

システムフロー (参考例)

移動型 ISM-T40

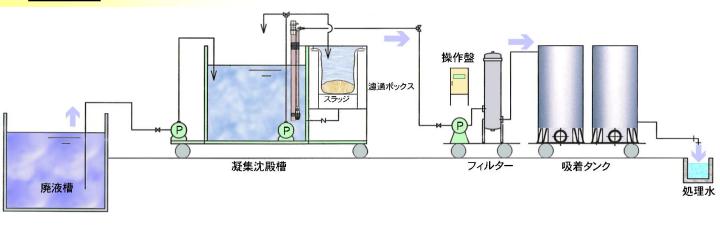

据付型 ISM-60

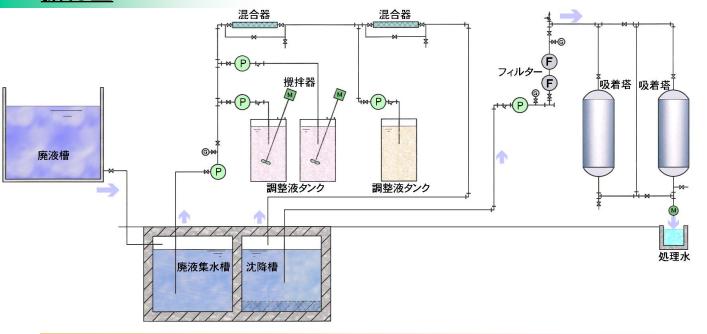

標準処理能力

T*型について・・・A型:1[m³]/B型:2[m³]

型式		<mark>総廃液量</mark> [m³/日] / [m³/シーズン]		電力[kW]	
ISM - T20	移動型	1~2	/ 25	A型:3.35	B型:3.35
ISM - T30		1~2	/ 40	A型:3.35	B型:3.35
ISM - T40		1~2	/ 60	A型:3.35	B型:3.35
ISM - 20T	据付型	1~2	/ 25	1. 75	
ISM - 30T		2~3	/ 40	1. 75	
ISM - 40		2~3	/ 50	1. 75	
ISM - 60		4~ 5	/ 75	1. 75	
ISM - 80		5 ~ 7	/ 100	1. 75	
ISM - 120		7~10	/ 150	1.	75
ISM - 160		10~14	/ 200	1.	75

廃水処理装置


いずしみず~ISM Izu Shi Mizu

環境

環境にやさしい農業のパートナー として、農薬廃液を確実に、簡単に、 低コストで、処理します。

農業

低コスト

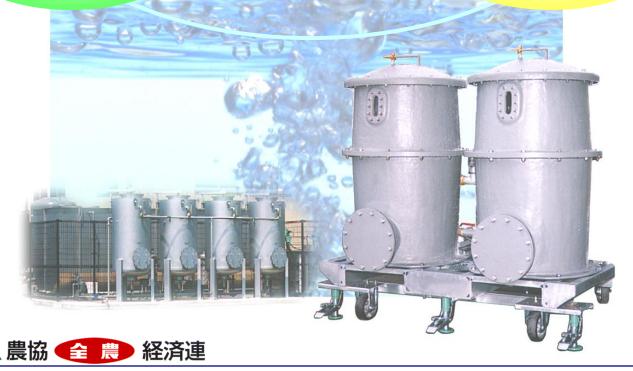




4月

18日発行)

(平成30年



〒920-0211 石川県金沢市湊3-8-1

TEL: 076-239-0118 / FAX: 076-238-0866

E-mail : info@meiwa-ind.co.jp HP : http://www.meiwa-ind.co.jp



粒状活性炭、精密ろ過フィルターが、 水を甦させる・・・



ISM-T40

コンパクトな移動型





ISM-40



ISM-60





容易な運転

操作が簡単

スラッジが僅少

維持費が安く経済的



ISM-80









吸着塔

粒状活性炭 表面拡大写真

ろ過塔

ろ過フィルター





08-M21





ISM-120





ISM-160

各写真には、オプションや特殊仕様など含まれているものもありますので、ご了承下さい。